


STORM SEWER MANHOLE

NEENAH R-1031 FRAME
AND GRATE.
THE WORDS "STORM" AND
"HANOVER PARK" SHALL
BE CAST INTO THE LID.

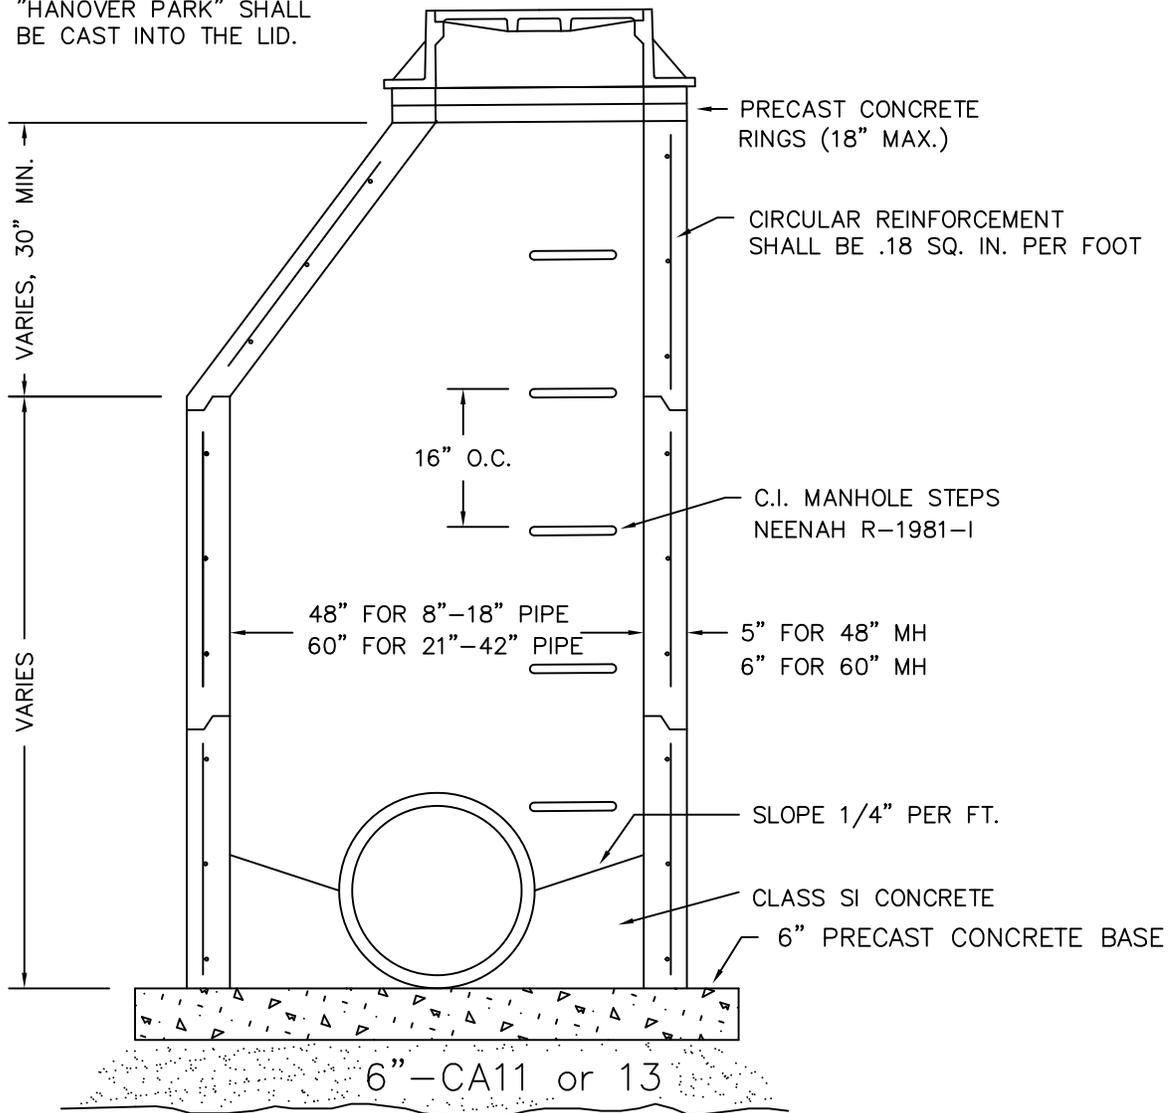

PRE-CAST REINFORCED CONCRETE RISER RINGS AND DOMES SHALL COMPLY WITH ASTM C-39.

ALL JOINTS BETWEEN PRE-CAST ELEMENTS, ADJUSTING RINGS AND MANHOLE FRAMES SHALL BE SET IN PLACE WITH A BUTYL RUBBER JOINT SEALANT.

FOR RESTRICTED DEPTH MANHOLES OMIT PRE-CAST CONE SECTION AND PROVIDE 8" THICK REINFORCED CONCRETE FLAT TOP SLAB WITH 24" ECCENTRIC OPENING

filename ac: Std Storm Manhole

REVISIONS:

1. 2/14/2025



Hanover Park^{USA}

STORM SEWER MANHOLE
STANDARD DETAIL