


SILT FENCE

2"x2"x36" FENCE POSTS 10' O/C WITH WOVEN WIRE FENCE (14 1/2 GAGE MIN. MAX. 6" MESH SPACING) OR 5' O/C WITHOUT WIRE FENCE.

FILTER CLOTH (FILTERX, MIRAFI 100X, STABLINKA T140N OR APPROVED EQUAL) TO BE FASTENED SECURELY TO FENCE POSTS WITH STAPLES OR SECURED TO WOVEN WIRE FENCE (IF USED) WITH TIES SPACED EVERY 24" AT TOP AND MID SECTION.

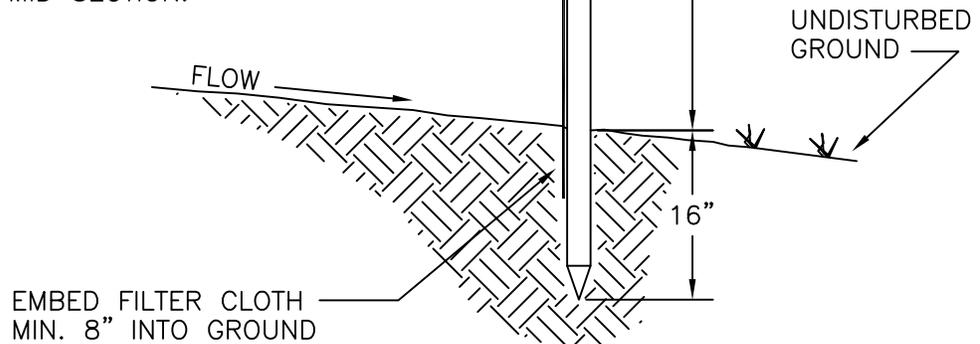

SILT FENCE SHALL BE INSTALLED AND INSPECTED BY HANOVER PARK ENGINEERING DEPARTMENT PERSONNEL PRIOR TO ANY OTHER CONSTRUCTION

WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVERLAPPED BY 6" AND FOLDED.

TOPSOIL STOCKPILES SHALL HAVE DIVERSION DITCHES PLACED AROUND THEM WITH A SILT TRAP BUILT AT THE LOW POINT OF THE DITCHES

SILT FENCE TO BE PROVIDED AROUND ENTIRE PERIMETER OF ALL WETLAND AREAS PRIOR TO MASS EARTHWORK START.

MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIAL REMOVED WHEN "BULGES" DEVELOP IN SILT FENCE.

Filename ac: Std Silt Fence

REVISIONS:

1. 2/14/2025



Hanover Park ^{USA}

SILT FENCE
STANDARD DETAIL